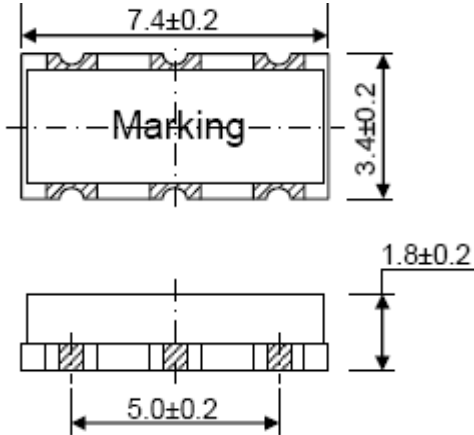
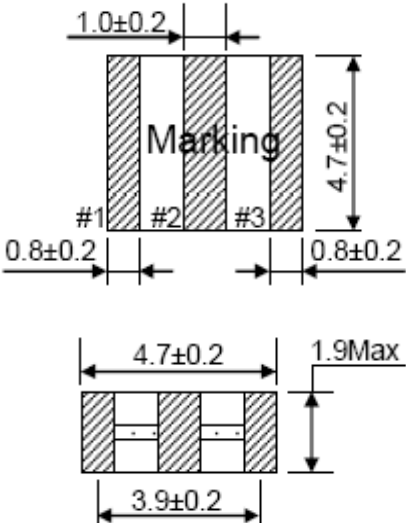
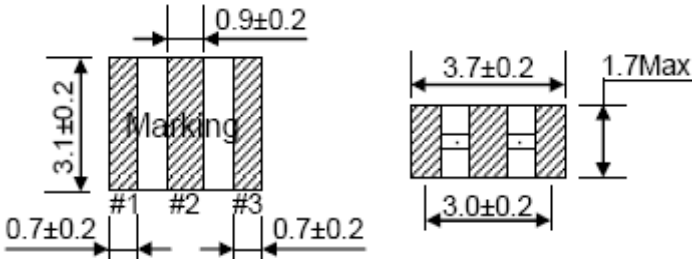
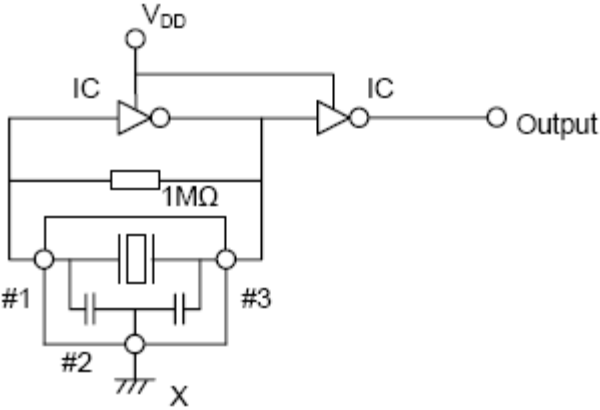


CERAMIC RESONATORS

ZTTC series

DIMENSIONS

ZTTC□MG	ZTTC□MT/MX
	
ZTTCV□MT/MX	TEST CIRCUIT DIAGRAM
	

PERFORMANCE INDEX

Part Number	Frequency Range (MHz)	Frequency Tolerance (%)	Resonant Resistance (Ω)	Temperture Characteristics of Oscillation Frequency (%)	Aging Rate (%)
ZTTC □ MG	2.00~2.99	±0.3,±0.5	100	± 0.3	± 0.5
	3.00~3.49	±0.3,±0.5	50	± 0.3	± 0.5
	3.50~8.00	±0.3,±0.5	30	± 0.3	± 0.5
ZTTC □ MT	8.00~13.00	± 0.5	25	± 0.3	± 0.5
ZTTC □ MX	13.01~50.00	± 0.5	40	± 0.3	± 0.5
ZTTCV □ MT	8.00~13.00	± 0.5	40	± 0.3	± 0.5
ZTTCV □ MX	13.01~50.00	± 0.5	40	± 0.3	± 0.5