


通讯调幅系列 陶瓷滤波器

Ceramic Filter for Communicatin AM Series

kHz CS455/450 系列 片式陶瓷滤波器 (4素子)

kHz CS455/450 Series of Ceramic Filter (Chip-type)

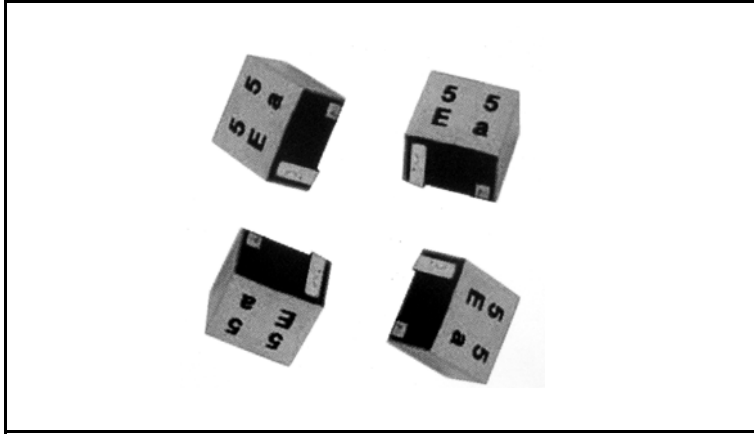

尺寸(Size) : 6.0 * 7.5 * t

■ 特点 Feature

- ▶ 适用于自动安装
Suitable for automatic mounting
- ▶ 极强的机械强度
Excellent mechanical strength
- ▶ 广泛的带宽和灵活的选择性
Wide bandwidth and high selectivity
- ▶ 适用于汽车收音机和各种频段收音机
Suitable for car radio and multi band radio


■ 技术特性 Technicsl Characteristics

| 型号 Part No. | 中心频率 Center Frequency (kHz) | 6分贝带宽 6dB Band Width (kHz) min | 50(40)分贝带宽 50(40)dB Band Width (kHz) max | 阻带耗 Stop Band Attenuation (dB)min | 通带波动 Pass Band Ripple (dB) max | 插入损耗 Insert Loss (dB) max | 输入/输出阻抗 Input/Output Impedance (KΩ) |
|----------------|--------------------------------------|---|---|--|---|---------------------------------|--|
| CS455A4 | 455 | ± 16.0 | ± 40.0 | 23.0 | 1.0 | 4 | 1000 |
| CS455B4 | 455 | ± 15.0 | ± 30.0 | 25.0 | 1.0 | 4 | 1000 |
| CS455C4 | 455 | ± 12.5 | ± 24.0 | 25.0 | 1.0 | 4 | 1000 |
| CS455D4 | 455 | ± 10.0 | ± 20.0 | 27.0 | 2.0 | 4 | 1500 |
| CS455E4 | 455 | ± 7.5 | ± 15.0 | 27.0 | 2.0 | 4 | 1500 |
| CS455F4 | 455 | ± 6.0 | ± 12.5 | 27.0 | 2.0 | 4 | 1500 |
| CS455G4 | 455 | ± 4.5 | ± 10.0 | 25.0 | 2.0 | 4 | 1500 |
| CS455H4 | 455 | ± 3.0 | ± 9.0 | 25.0 | 2.0 | 4 | 1500 |

注：中心频率 (fo)也有450khz的

Also available with center frequency(fo) of 450khz

■ 外型尺寸 Dimension

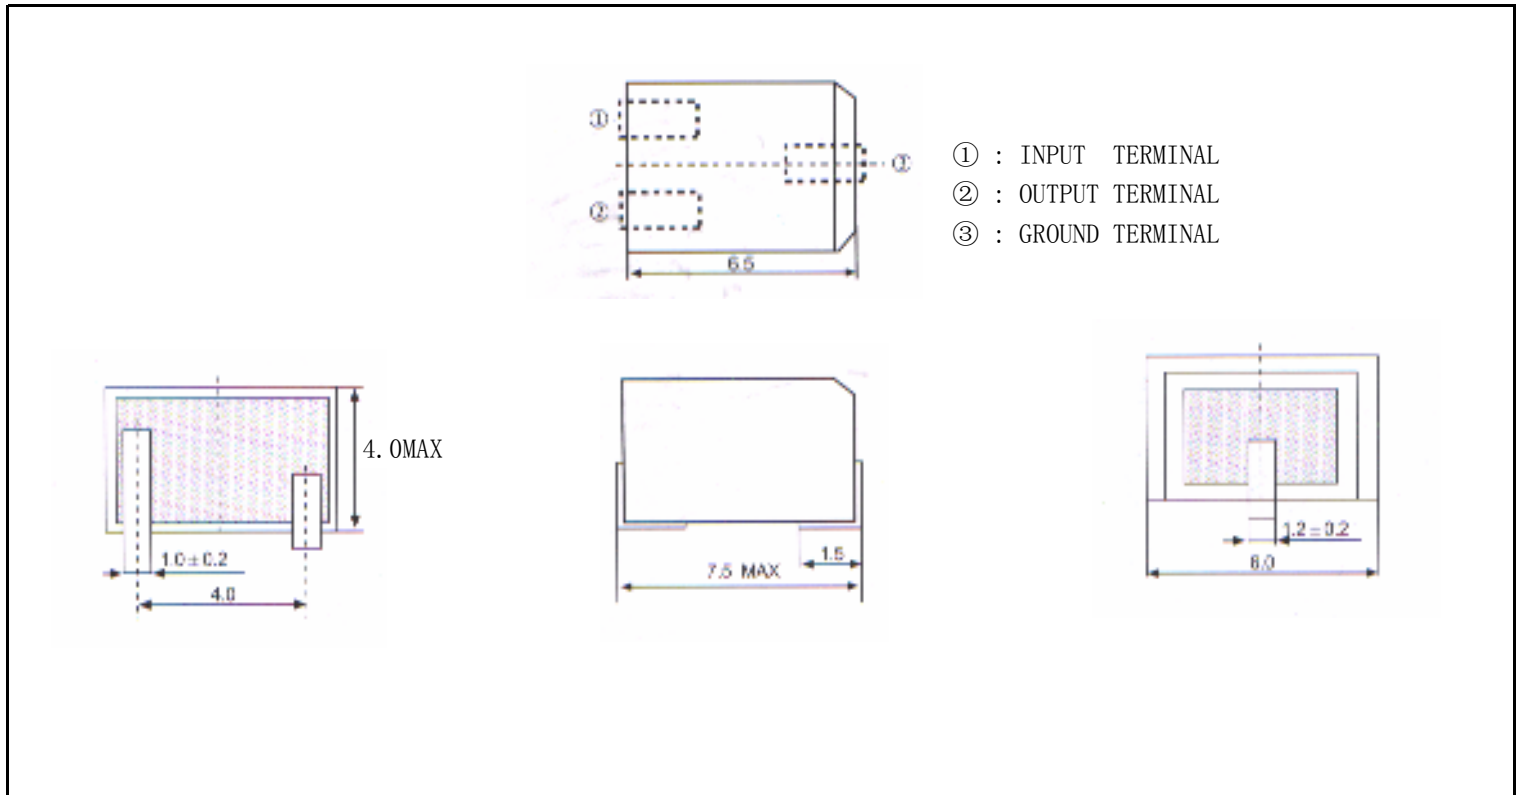

■ 测试电路 Test Circuit

