

通讯调幅系列 陶瓷滤波器

Ceramic Filter for Communicatin AM Series

kHz CS455/450 系列 片式陶瓷滤波器 (6素子)

kHz CS455/450 Series of Ceramic Filter (Chip-type)



尺寸(Size) : 11.5 * 7.5 * t

■ 特点 Feature

- ▶ 适用于自动安装
Suitable for automatic mounting
- ▶ 极强的机械强度
Excellent mechanical strength
- ▶ 广泛的带宽和灵活的选择性
Wide bandwidth and high selectivity
- ▶ 适用于汽车收音机和各种频段收音机
Suitable for car radio and multi band radio


■ 技术特性 Technicsl Characteristics

型号 Part No.	中心频率 Center Frequency (kHz)	6分贝带宽 6dB Band Width (kHz) min	50(40)分贝带宽 50(40)dB Band Width (kHz) max	阻带耗 Stop Band Attenuation (dB)min	通带波动 Pass Band Ripple (dB) max	插入损耗 Insert Loss (dB) max	输入/输出阻抗 Input/Output Impedance (KΩ)
CS455B6	455	±13.5	±30.0	45.0	2.0	4	1000
CS455C6	455	±12.5	±25.0	45.0	3.0	4	1000
CS455D6	455	±10.0	±20.0	45.0	3.0	4	1500
CS455E6	455	±7.5	±15.0	45.0	3.0	4	1500
CS455F6	455	±6.0	±12.5	45.0	3.0	4	1500
CS455G6	455	±4.5	±10.0	45.0	3.0	4	1500
CS455H6	455	±3.0	±9.0	45.0	3.0	4	1500

注：中心频率 (fo)也有450khz的

Also available with center frequency(fo)of 450khz

■ 外型尺寸 Dimension

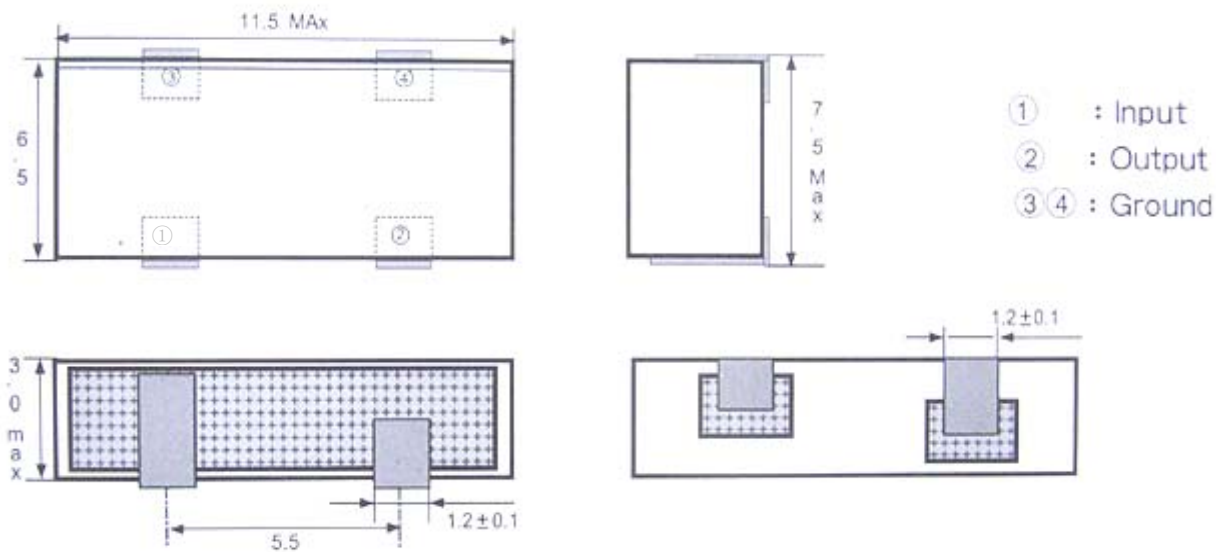

■ 测试电路 Test Circuit

